

DS-2CE72UF3T-E 4K ColorVu POC Fixed Turret Camera



- High quality imaging with 8 MP, 3840 × 2160 resolution
- 24/7 color imaging
- Clear imaging against strong back light due to 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- 2.8 mm, 3.6 mm fixed focal lens
- Up to 40 m white light distance for bright night imaging
- Water and dust resistant (IP67)

▪ Specification


Camera	
Image Sensor	8 MP CMOS
Signal System	PAL/NTSC
Resolution	3840 (H) × 2160 (V)
Frame Rate	TVI: 8 MP @ 12.5 fps/15 fps, 3K @ 20 fps, 1080P @ 25 fps/30 fps
Min. Illumination	0.0005 Lux@(F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/12.5 s to 1/50,000 s;NTSC: 1/15 s to 1/50,000 s
Lens	2.8 mm, 3.6 mm fixed focal lens
Field of View	2.8 mm, horizontal FOV: 110°, vertical FOV: 59°, diagonal FOV: 131° 3.6 mm, horizontal FOV: 93°, vertical FOV: 48°, diagonal FOV: 113°
Lens Mount	M16
Light Alarm	Solid Light Alarm (White Light)
Day & Night	24/7 Color Imaging
WDR (Wide Dynamic Range)	≥130 dB
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360°
Image	
White Light	Auto/Off
Image Mode	STD/HIGH-SAT/HIGHLIGHT
AGC	Yes
Day/Night Mode	Color
White Balance	Auto/Manual
AE (Auto Exposure) Mode	WDR,BLC,HLC,Global,HLS
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable motion areas
Noise Reduction	3D DNR/2D DNR
Language	English
Function	Brightness,Contrast,Mirror,Sharpness,Anti-Banding,Smart Light
Interface	
Video Output	1 HD analog output
General	
Operating Conditions	-40°C to 50°C (-40°F to 130°F), Humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%/PoC.at *You are recommended to use one power adapter for one camera, and use 2-pin power supply for long-distance power supply.
Consumption	Max. 5.1 W
Protection Level	IP67
Material	Main body: Metal, Enclosure: Plastic
White Light Range	Up to 40 m
Communication	HIKVISION-C
Dimension	Ø109.98 mm × 98.27 mm (4.33" × 3.87")
Weight	Approx. 350 g (0.77 lb.)

▪ Available Model

DS-2CE72UF3T-E(2.8mm)

DS-2CE72UF3T-E(3.6mm)

▪ Dimension

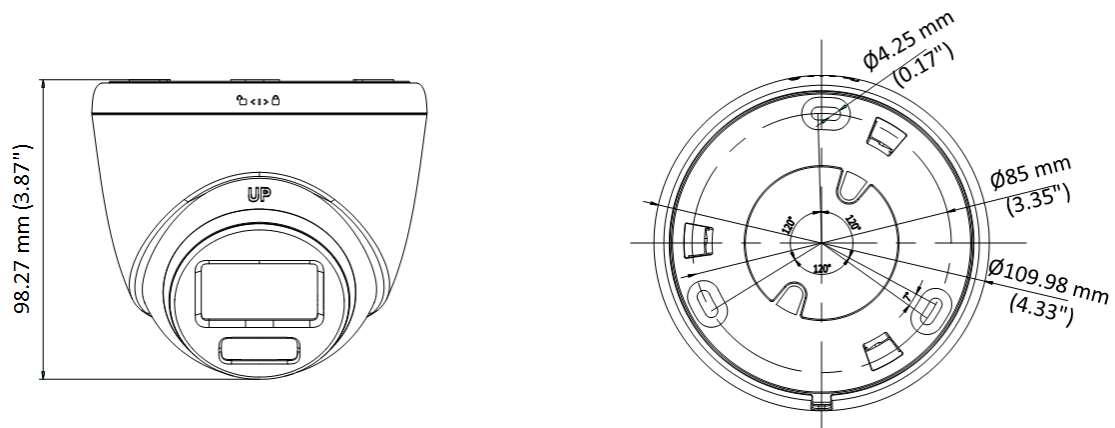

▪ Accessory

▪ Optional

WMS+PC110T Wall Mount	PM Vertical Pole Mount	CM Corner Mount	ABS Inclined Ceiling Mount	CBS Junction Box

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq