

# Vi10480

## 480W Hardened DIN Rail Power Supply

### Features

- High efficiency up to 94% with universal AC input range (85~264Vac)
- 480W output at 48~56VDC with 150% (720W) peak load capacity
- Hardened with wide operating temperature -25°C~70°C
- Support 1+1 or N+1 redundant system
- Built-in current sharing function
- Built in DC OK relay contact
- Output protections: OVP/OLP/SCP/OTP
- Easy Fuse Tripping due to High Overload Current
- 100% full load burn-in test
- Free air convection



### Applications

- Transportation, Perimeter applications
- PoE applications requiring wide operating temperature
- Applications requiring back up power
- Outdoor, transit, perimeter, and parking lot applications

Vigtron's MaxiiPower™ Vi10480 Din Rail Power Supply is designed for hardened applications. A wide operating temperature range of -25°C to 70°C assures reliable operation for many mission critical operations. It provides many features designed for its own protection and connection to the device its powering. The Vi10480's combined a 150% peak load up to 720W, over current protection and current limiting will protect itself and powered devices. An alarm relay provides notification in the event of failures. Outputs of multiple Vi10480s can be connected together to increase the total power or serve as a back up supply. Multiple DIN Rail mountings simplifies installation.

The Vigtron Vi10480 can be configured for a variety of applications providing both additive and back up power.

# Technical Specifications\*

## Electrical

### Output:

Output Power	480W, 48-56VDC (Adjustable) @ 10A Max.
Ripple and Noise	≤480mV at 0~70°C ≤480mV at -25°C
Voltage Accuracy	±3.0%
Line Regulation	±0.5%
Load Regulation	±1.0%
Set-up Time	<3S@230VAC
Hold up Time	≥20mS (230VAC input, Full load)
Temperature Coefficient	±0.03%/°C
Overshoot / Undershoot	<5.0%

### Input:

Voltage Range	85VAC~264VAC, 130VDC-350VDC
Frequency Range	47Hz~63Hz
Power Factor	0.99/110VAC, 0.95/230VAC
Efficiency	93.8%
AC Current	<7.0 A/100VAC, <3.5A/230VAC (max.)
Inrush Current	<20A/110VAC, <40A/230VAC, Cold start
Leakage	Input-Output <0.25mA, Input-PG:<3.5mA

### Protection:

Over Load	110%~150% of rated current, Auto recovery
Over voltage	58~63VDC, constant voltage, Auto recovery
Over temperature	115±5°C, shut down O/P, Auto recovery
Short Circuit	Long-term mode, Auto recovery
DC-OK LED	On: when output is up to 90% of rated output voltage Off: when output is down to 80% of rated output voltage
DC-OK Relay	Max 30V/1A or 60V/0.3A or 30Vac/0.3A, Resistive load

## Regulatory

Safety	UL508, UL60950, EN60950, CE
EMC Emission	EN55022, EN55024, FCC PART 15 Class B
EMC Immunity	EN61000-4-2,3,4,5,6,8,11; heavy industry level
Environmental	RoHS, WEEE

## Environmental

Humidity	Operating: 20 to 90%, non-condensing Storage: 5 to 95%, non-condensing
Temperature	Operating: -25°C to +70°C Storage: -40°C to +85°C

## Mechanical

Dimensions	5x2.8x4.9in, 127x70x124mm (LxWxH)
Weight	2.54 lbs (1.15Kg)
Material	Sheet Metal

\*Specifications subject to change without notice.

## Ordering Information

Part No.	Description
<b>Vi10480</b>	<b>DIN Rail 480W Power Supply</b>




TEL (+1) 858-484-5209 • FAX (+1) 858-484-1205  
7810 Trade Street, Suite 100, San Diego, CA 92121, USA • support@vigatron.com • www.vigatron.com




# Technical Specifications\*


## De-Rating Chart

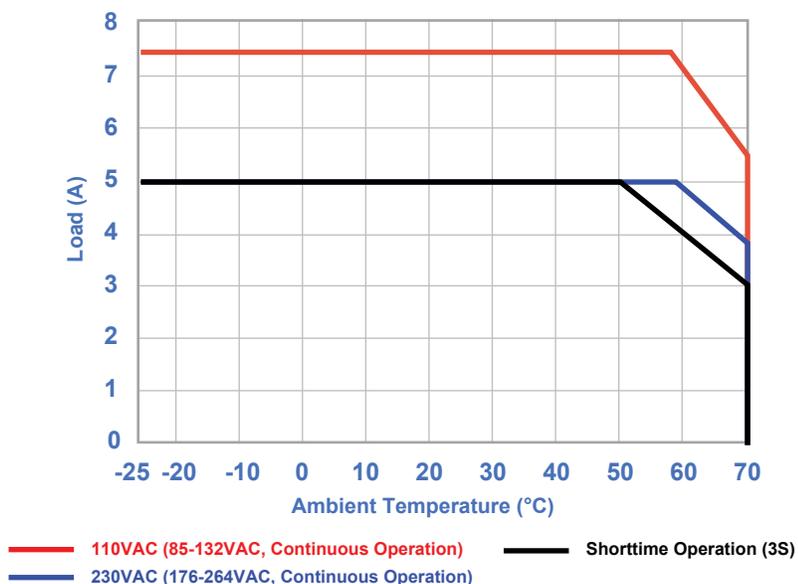


# Mechanical Drawings

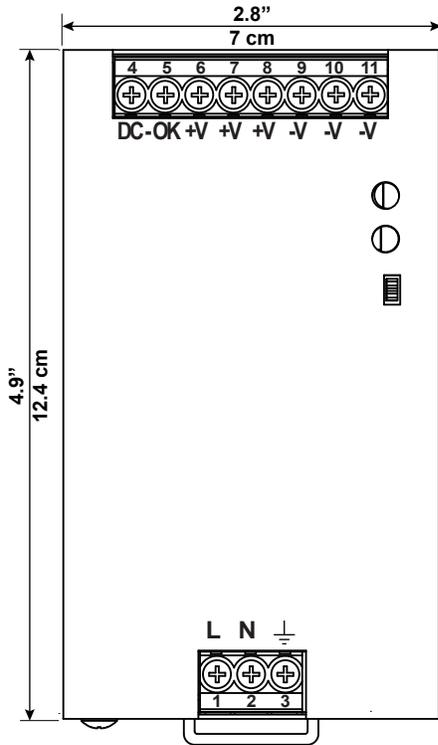

Left View

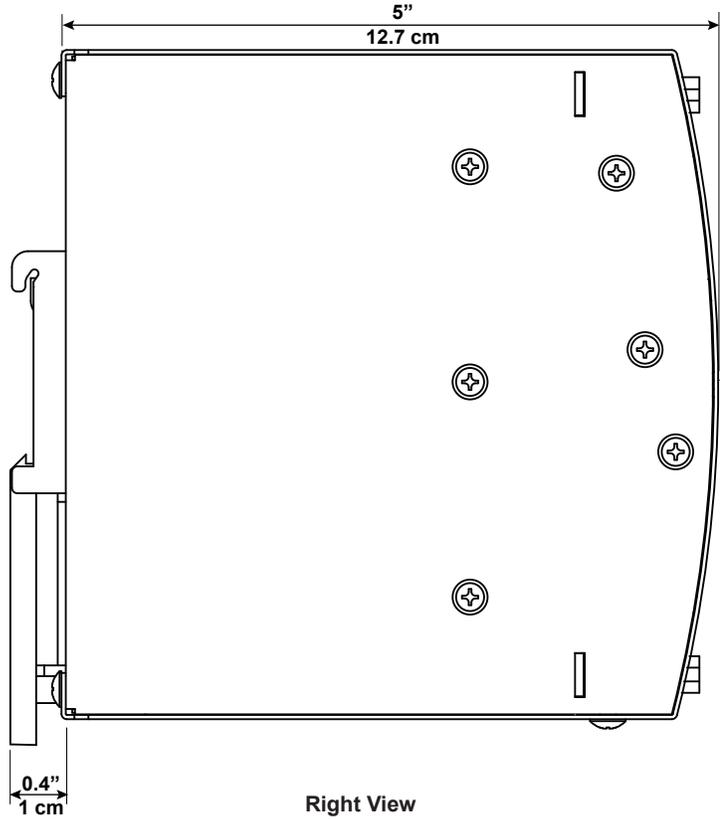

Right View

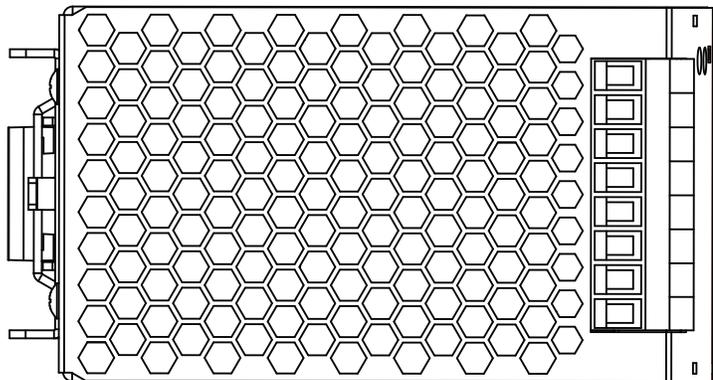


Top View

# Application Drawings




## Powering Multiple Remote PoE Cameras

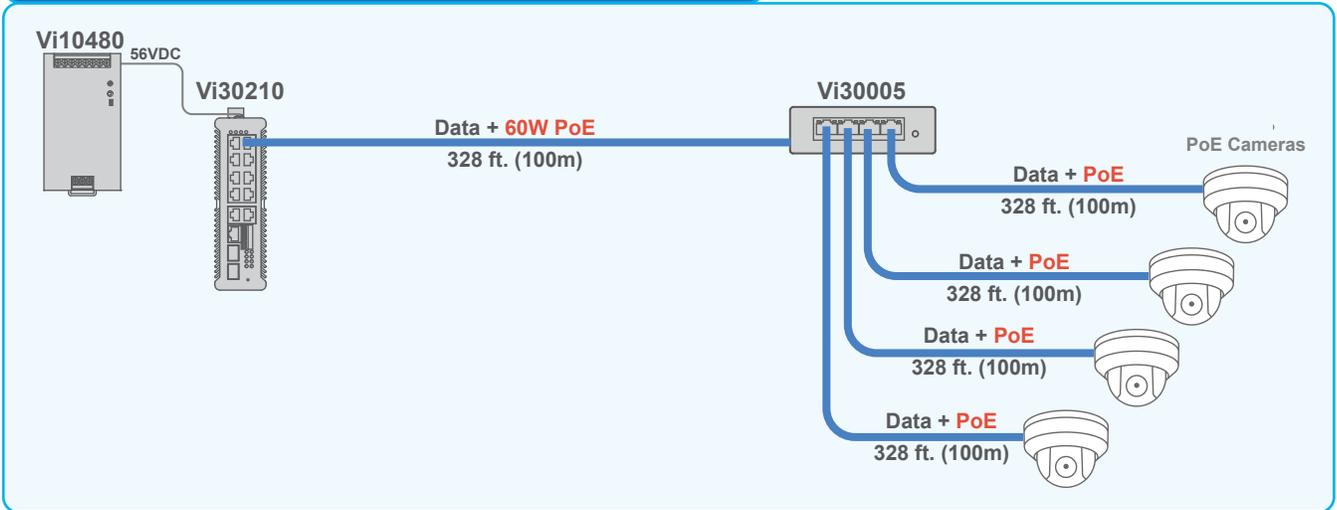

The Vi10480 can be used to power a local PoE switch, a remote PoE powered PoE switch and multiple connected PoE cameras.

## Powering High PoE Switches

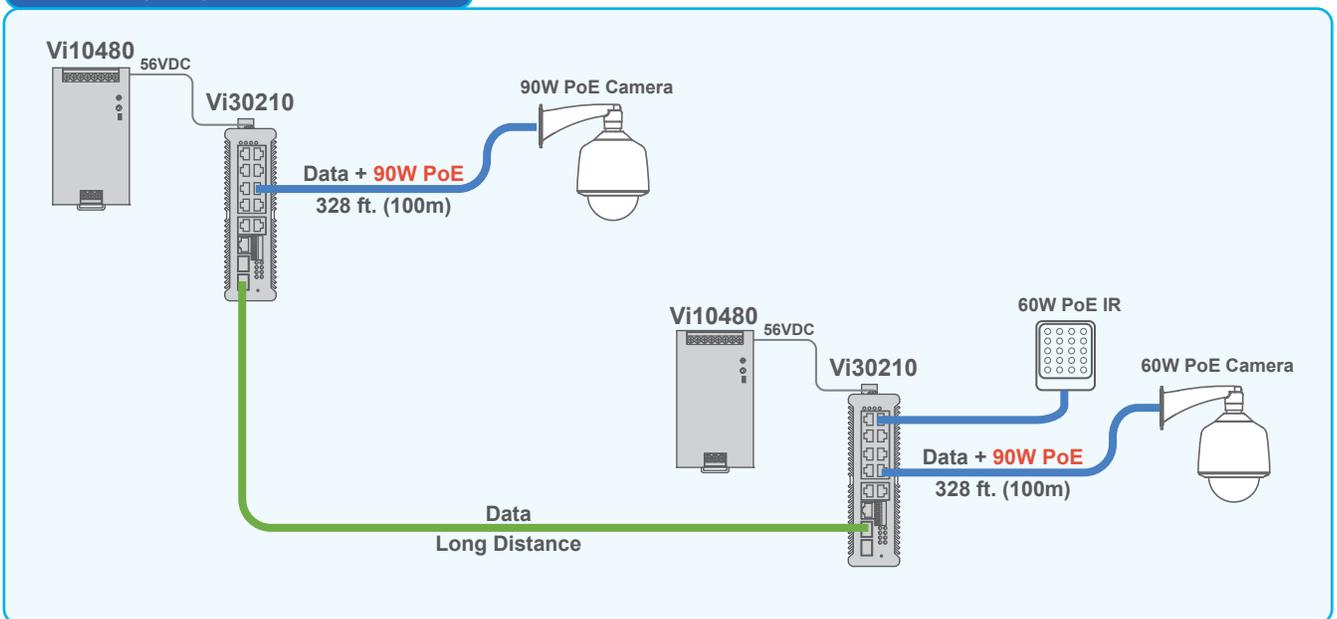

Multiple Vi10480s can be used in a wide variety to power High power cameras and IR illuminators.